

# AUTOMATIC HEAVY DUTY COMBO SHRINK SYSTEM

MODEL: HDX250A



## FEATURES


### CONTROLS

- All Electric, No Air Required
- 7" Color Touchscreen
- Store Up to 128 Recipes
- Multi-level Password Protection
- Multiple Language
- Two Emergency Stop Buttons
- USB & SD Interface
- Variable Speed Conveyors

### SEAL AREA

- 20" x 20", One Piece Blade
- Closing Conveyor
- Horizontal & Vertical Product Sensors
- Adjustable Seal Jaw Opening
- Adjustable Seal Pressure
- FDA Belts
- Slide On Overhead Film Cradle
- Overhead Scrap Rewind

HDX250A

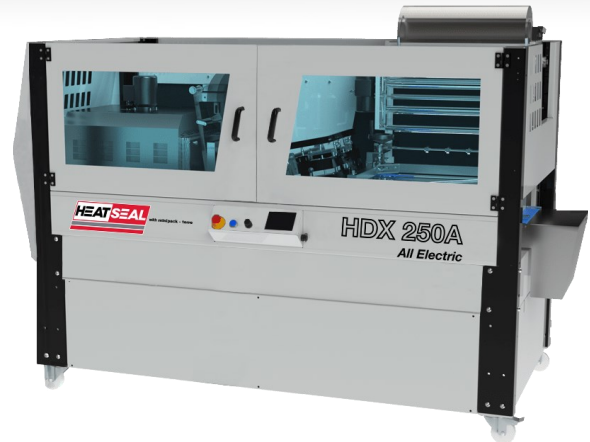

### TUNNEL FEATURES

- 18" W x 10"H x 23"L Chamber
- Variable Speed Roller Conveyor
- Adjustable Louvers

### OTHER FEATURES

- Compact Design
- Multiple Alarms for Machine Monitoring
- Powder Coated Steel Construction
- Locking Casters
- Two Year Limited Warranty



## MODEL SPECS

|                           |   |
|---------------------------|---|
| SEAL AREA                 | 20"W, 20"L (508mm W, 508mm L)                           |
| TUNNEL CHAMBER            | 18" W, 10" H, 23" L (458mm W, 254mm H, 585mm L)         |
| FILM CAPACITY             | 23.5" W, 11.75"OD (600mm W, 300mm OD)                   |
| PRODUCTION RATE           | 0 – 20 PPM, Dependent upon product and film size        |
| MAXIMUM PRODUCT DIMENSION | 15.5" W, 16.5" L, 4.5" H<br>(400mm W, 420mm L, 120mm H) |
| POWER REQUIREMENTS        | 208-240VAC, THREE PHASE, 22A                            |
| CONVEYOR HEIGHT           | 34.25" (870mm)  |
| OVERALL DIMENSIONS        | 95" L, 47" W, 67" H<br>(2390mm L, 1190mm W, 1680mm H)   |
| WEIGHT                    | 1496 Lbs. (677 Kg)                                      |

## AVAILABLE OPTIONS

- 2' Gravity Exit Conveyor
- PTFE Mesh Belt Overlay for Tunnel Conveyor
- Gravity Turnaround Conveyors Available
- Infeed Conveyors
  - Flighted or Belted

